
optoma.nl

UHD60

A greater sense of depth and realism in every scene



- 4K UHD resolution and HDR compatible
- Amazing colour accurate Rec.709 colours, 3000
 ANSI lumens
- Easy connectivity HDMI 2.0, HDCP 2.2, S/PDIF, 2x 4W speakers
- Easy installation vertical lens shift

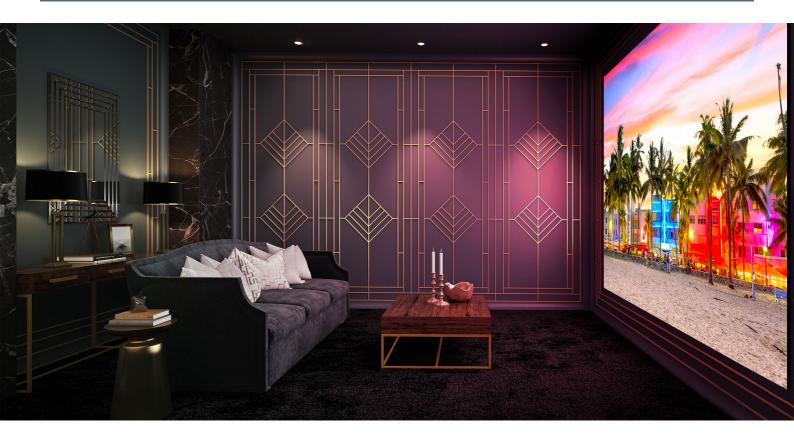

TV, gaming and movie fans can now enjoy impressive 4K cinema quality images in their own home with the Optoma UHD60. Incorporating Ultra HD 4K resolution it brings content to life with thrilling detail, colour and contrast for a stunningly immersive experience.





Specifications

EAN: 5055387650022, Colour: V	Vhite
Display/image	
Display technology	DLPTM
Resolution	UHD (3840x2160)
Brightness	3.000 lumens
Contrast ratio	1.000.000:1
Native aspect ratio	16:9
Aspect ratio - compatible	4:3
Horizontal scan rate	31 ~ 135Khz
Vertical scan rate	24 ~ 120Hz
Uniformity	85%
Screen size	0.67m ~ 7.68m (26.45" ~ 302.2") diagonal
Lamp info	
Light source type	Lamp
Lamp watts	240
Lamp life hours (up to)	4000 (Bright), 15000 (Dynamic), 10000 (Eco)
Optical	
Throw ratio	1.39:1 ~ 2.22:1
Projection distance (m)	1.3m - 9.3m
Zoom	1.6
Zoom type	Manual
Focal length (mm)	20.91mm~32.62mm/0.823"~1.284"
Focal length (mm) Lens shift	20.9 mm~32.62mm/0.823 ~ 1.284 Vertical +15%
Lens snm Native offset	100%
Connectivity	100 /0
Connections	
Connections	Inputs 1 x HDMI 2.0, 1 x HDMI 1.4a 3D support + MHL, 1 x
	VGA (YPbPr/RGB), 1 x Audio 3.5mm, 1 x USB-A service
	Outputs 1 x Audio 3.5mm, 1 x S/PDIF, 1 x USB-A power 1.5A, 1 x 12V trigger
	Control 1 x RS232, 1 x RJ45
	Control + X + 102.02, + X + 104.0
General	
Noise level (typical)	25dB
Noise level (max)	27dB
PC compatibility	UHD, WQHD, WUXGA, FHD, UXGA, SXGA, WXGA, HD, XGA, SVGA, VGA, Mac
2D compatibility	480i/p, 576i/p, 720p(50/60Hz), 1080i(50/60Hz), 1080p(50/60Hz), 2160p(50/60Hz)
Security	Security bar, Kensington Lock, Password protected interface
OSD / display languages	9 languages: English, French, German, Italian, Japanese, Portuguese, Russian, Chinese (simplified), Spanish
Operating conditions	5°C~40°C/41°F~104°F, max altitude 3000M/9843ft, max humidity 85%
Remote control	Backlit home remote
Speaker count	2
Watts per speaker	- 4W
In the box	AC power cord, remote control, 2x AA batteries, lens cap,
	basic user manual
Networking	
LAN - control	Yes
Power	
Power supply	100 ~ 240V, 50 ~ 60Hz
Power consumption (standby)	0.5W
Power consumption (min)	249W
· · · · · · · · · · · · · · · · · · ·	305W
Power consumption (max)	
,	00077
Weight and dimensions	
Weight and dimensions Dimensions (W x D x H) mm	498 x 331 x 141
Power consumption (max) Weight and dimensions Dimensions (W x D x H) mm Gross weight Net weight	







Copyright © 2023, Optoma and its logo is a registered trademark of Optoma Corporation. Optoma Europe Ltd is the licensee of the registered trademark. All other product names and company names used herein are for identification purposes only and may be trademarks or registered trademarks of their respective owners. Errors and omissions excepted, all specifications are subject to change without notice. All images are for representation purposes only and may be simulated. 27082023053755