
UHD65 True to life detail - 4K Ultra HD projector



- 4K UHD resolution and HDR compatible
- Amazing colour accurate Rec.709 colours, 2200
 ANSI lumens
- Fluid viewing PureMotion frame interpolation
- Easy installation vertical lens shift

Designed for home cinema rooms, the UHD65 offers unforgettable 4K

digital cinema quality images in the comfort of your own home. Incorporating Ultra HD 4K resolution, it brings movies to life with thrilling detail, colour and contrast – taking entertainment to the next level.

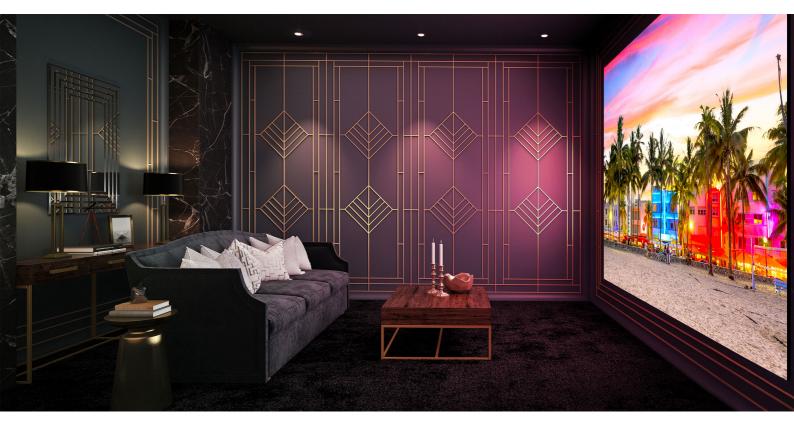





Specifications

EAN: 5055387650039, Colour: Black	
Display/image	
Display technology	DLPTM
Resolution	UHD (3840x2160)
Brightness	2,200 lumens
Contrast ratio	1,200,000:1
Native aspect ratio	16:9
Aspect ratio - compatible	4:3
Horizontal scan rate	31 ~ 135Khz
Vertical scan rate	24 ~ 120Hz
Uniformity	85%
Screen size	0.67m ~ 7.68m (26.45" ~ 302.2") diagonal
Lamp info	
Light source type	Lamp
Lamp watts	240
Lamp life hours (up to)	4000 (Bright), 15000 (Dynamic), 10000 (Eco)
Optical	
Throw ratio	1.39:1 ~ 2.22:1
Projection distance (m)	1.3m - 9.3m
Zoom	1.6
Zoom type	Manual
Focal length (mm)	20.91mm~32.62mm/0.823"~1.284"
Lens shift	Vertical +15%
Native offset	100%
Connectivity	
Connections	Inputs 1 x HDMI 2.0, 1 x HDMI 1.4a 3D support + MHL, 1 x
	VGA (YPbPr/RGB), 1 x Audio 3.5mm, 1 x USB-A service
	Outputs 1 x Audio 3.5mm, 1 x S/PDIF, 1 x USB-A power
	1.5A, 1 x 12V trigger
	Control 1 x RS232, 1 x RJ45
General	
Noise level (typical)	25dB
Noise level (max)	27dB
PC compatibility	UHD, WQHD, WUXGA, FHD, UXGA, SXGA, WXGA, HD, XGA, SVGA, VGA, Mac
2D compatibility	480i/p, 576i/p, 720p(50/60Hz), 1080i(50/60Hz), 1080p(50/60Hz), 2160p(50/60Hz)
Converter	Coourity box. Kanajastan Look, Decoward protected interface
Security	Security bar, Kensington Lock, Password protected interface
	9 languages: English, French, German, Italian, Japanese, Portuguese, Russian, Chinese (simplified), Spanish
OSD / display languages	9 languages: English, French, German, Italian, Japanese,
OSD / display languages Operating conditions	9 languages: English, French, German, Italian, Japanese, Portuguese, Russian, Chinese (simplified), Spanish 5°C~40°C/41°F~104°F, max altitude 3000M/9843ft, max
OSD / display languages Operating conditions Remote control	9 languages: English, French, German, Italian, Japanese, Portuguese, Russian, Chinese (simplified), Spanish 5°C~40°C/41°F~104°F, max altitude 3000M/9843ft, max humidity 85%
OSD / display languages Operating conditions Remote control Speaker count	9 languages: English, French, German, Italian, Japanese, Portuguese, Russian, Chinese (simplified), Spanish 5°C~40°C/41°F~104°F, max altitude 3000M/9843ft, max humidity 85% Backlit home remote
Security OSD / display languages Operating conditions Remote control Speaker count Watts per speaker In the box	9 languages: English, French, German, Italian, Japanese, Portuguese, Russian, Chinese (simplified), Spanish 5°C-40°C/41°F-104°F, max altitude 3000M/9843ft, max humidity 85% Backlit home remote 2
OSD / display languages Operating conditions Remote control Speaker count Watts per speaker	9 languages: English, French, German, Italian, Japanese, Portuguese, Russian, Chinese (simplified), Spanish 5°C-40°C/41°F~104°F, max altitude 3000M/9843ft, max humidity 85% Backlit home remote 2 4W AC power cord, remote control, 2x AA batteries, lens cap,
OSD / display languages Operating conditions Remote control Speaker count Watts per speaker In the box Input lag	9 languages: English, French, German, Italian, Japanese, Portuguese, Russian, Chinese (simplified), Spanish 5°C-40°C/41°F~104°F, max altitude 3000M/9843ft, max humidity 85% Backlit home remote 2 4W AC power cord, remote control, 2x AA batteries, lens cap, basic user manual
OSD / display languages Operating conditions Remote control Speaker count Watts per speaker In the box Input lag Networking	9 languages: English, French, German, Italian, Japanese, Portuguese, Russian, Chinese (simplified), Spanish 5°C-40°C/41°F~104°F, max altitude 3000M/9843ft, max humidity 85% Backlit home remote 2 4W AC power cord, remote control, 2x AA batteries, lens cap, basic user manual
OSD / display languages Operating conditions Remote control Speaker count Watts per speaker In the box Input lag Networking LAN - control	 9 languages: English, French, German, Italian, Japanese, Portuguese, Russian, Chinese (simplified), Spanish 5°C-40°C/41°F~104°F, max altitude 3000M/9843ft, max humidity 85% Backlit home remote 2 4W AC power cord, remote control, 2x AA batteries, lens cap, basic user manual 80.00ms
OSD / display languages Operating conditions Remote control Speaker count Watts per speaker In the box Input lag Networking LAN - control Power	 9 languages: English, French, German, Italian, Japanese, Portuguese, Russian, Chinese (simplified), Spanish 5°C-40°C/41°F~104°F, max altitude 3000M/9843ft, max humidity 85% Backlit home remote 2 4W AC power cord, remote control, 2x AA batteries, lens cap, basic user manual 80.00ms
OSD / display languages Operating conditions Remote control Speaker count Watts per speaker In the box Input lag Networking LAN - control Power Power supply	9 languages: English, French, German, Italian, Japanese, Portuguese, Russian, Chinese (simplified), Spanish 5°C-40°C/41°F-104°F, max altitude 3000M/9843ft, max humidity 85% Backlit home remote 2 4W AC power cord, remote control, 2x AA batteries, lens cap, basic user manual 80.00ms Yes
OSD / display languages Operating conditions Remote control Speaker count Watts per speaker In the box Input lag Networking LAN - control Power Power supply Power consumption (standby)	9 languages: English, French, German, Italian, Japanese, Portuguese, Russian, Chinese (simplified), Spanish 5°C-40°C/41°F-104°F, max altitude 3000M/9843ft, max humidity 85% Backlit home remote 2 4W AC power cord, remote control, 2x AA batteries, lens cap, basic user manual 80.00ms Yes 100 ~ 240V, 50 ~ 60Hz
OSD / display languages Operating conditions Remote control Speaker count Watts per speaker In the box Input lag Networking LAN - control Power Power Power supply Power consumption (standby) Power consumption (min)	9 Ianguages: English, French, German, Italian, Japanese, Portuguese, Russian, Chinese (simplified), Spanish 5°C-40°C/41°F~104°F, max altitude 3000M/9843ft, max humidity 85% Backlit home remote 2 4W AC power cord, remote control, 2x AA batteries, lens cap, basic user manual 80.00ms Yes 100 ~ 240V, 50 ~ 60Hz 0.5W
OSD / display languages Operating conditions Remote control Speaker count Watts per speaker In the box Input lag Networking LAN - control Power Power P Power consumption (standby) Power consumption (min) Power consumption (max)	9 Ianguages: English, French, German, Italian, Japanese, Portuguese, Russian, Chinese (simplified), Spanish 5°C-40°C/41°F~104°F, max altitude 3000M/9843ft, max humidity 85% Backlit home remote 2 4W AC power cord, remote control, 2x AA batteries, lens cap, basic user manual 80.00ms Yes 100 ~ 240V, 50 ~ 60Hz 0.5W 249W
OSD / display languages Operating conditions Remote control Speaker count Watts per speaker In the box Input lag Networking LAN - control Power Power consumption (standby) Power consumption (min) Power consumption (max) Weight and dimensions	9 Ianguages: English, French, German, Italian, Japanese, Portuguese, Russian, Chinese (simplified), Spanish 5°C-40°C/41°F~104°F, max altitude 3000M/9843ft, max humidity 85% Backlit home remote 2 4W AC power cord, remote control, 2x AA batteries, lens cap, basic user manual 80.00ms Yes 100 ~ 240V, 50 ~ 60Hz 0.5W 249W
OSD / display languages Operating conditions Remote control Speaker count Watts per speaker In the box	9 Ianguages: English, French, German, Italian, Japanese, Portuguese, Russian, Chinese (simplified), Spanish 5°C-40°C/41°F~104°F, max altitude 3000M/9843ft, max humidity 85% Backlit home remote 2 4W AC power cord, remote control, 2x AA batteries, lens cap, basic user manual 80.00ms Yes 100 ~ 240V, 50 ~ 60Hz 0.5W 249W 305W







Copyright © 2023, Optoma and its logo is a registered trademark of Optoma Corporation. Optoma Europe Ltd is the licensee of the registered trademark. All other product names and company names used herein are for identification purposes only and may be trademarks or registered trademarks of their respective owners. Errors and omissions excepted, all specifications are subject to change without notice. All images are for representation purposes only and may be simulated. 25082023043526